

Technical Data Sheet

S 5 EVTm Worm Pump with integrated pan mixer

You've got a job to do?

Here's the right machine for it!

Infinite number of possible applications

- Base coat plaster
- Sealing slurry
- Injection mortar and filling mortar
- Glass-fibre-reinforced concrete
- Repair mortar and Insulating plaster
- Sprayed and textured render
- Fire proofing
- Scraped and floating render
- Dispersion plaster
- Cementitious adhesive
- Loam rendering
- Masonry mortar

And much more.....



The central switchbox on the S 5 also acts as a power distributor for attached devices, e.g. mixers or compressors.


S 5 EVTm worm pump with integrated pan mixer

This variant is used wherever materials are being processed that need to be mixed particularly intensively. The pan mixer (TM 100) has a capacity of 80 l and an electric drive with 2.2 kW of power. The size of the material hopper and mixer are ideally matched to each other.

- The ingenious arrangement of the mixing tools provides an optimum and extremely homogeneous mixing result
- The low filling height makes filling from sack or shovel easy
- To clean the pan mixer, simply fold up the lid

Contact the hire desk for further technical information, quotes and availability.

0333 006 5880

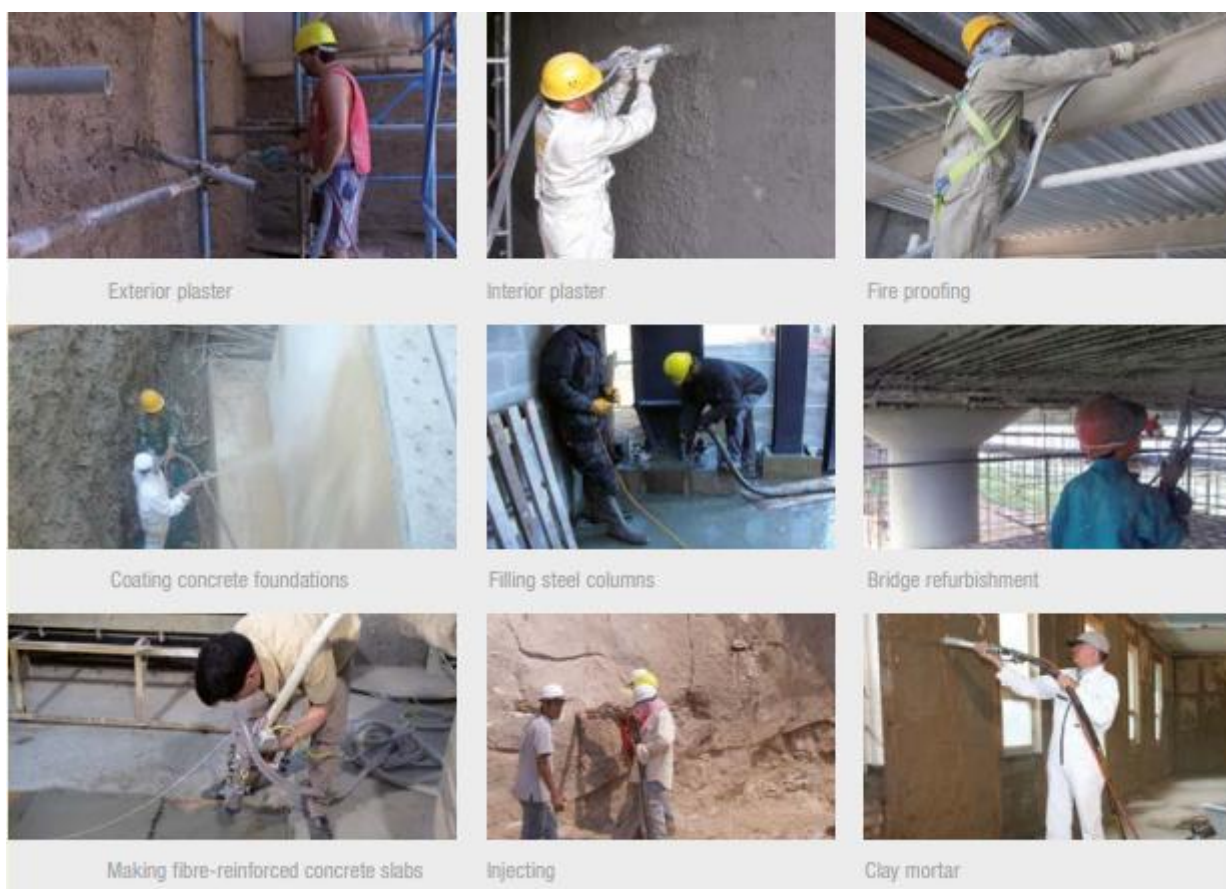

Technical Data.

	S 5 EVT M
Model	With Pan mixer
Worm Pump	2L6
Delivery Rate*	7-40 l/min
Delivery pressure	25 bar
Delivery range**	up to 60 m
Delivery height**	up to 40 m
Drive motor	5.5 kW, 400 V, 50 Hz
Mixer drive	2.2 kW
Hopper volume	100 l
Length	2,505 mm
Width	680 mm
Height	1,150 mm
Weight	400 kg
Max. grain size	6 mm
Pressure connection M	M 50

Contact the hire desk for further technical information, quotes and availability.

0333 006 5880